

AcuPNL15HB

15" Sunlight Readable Panel PC

with 6th Gen *i5* 6200U, IP65 Facial Waterproof and Aluminum Anodized Chassis

User's Guide
Edition 1.0



Overview

AcuPNL15HB, rugged Panel PC with a stronger aluminum anodized chassis, is specially engineered to survive from the most demanding touch working environment. Based on 6th-generation Intel® Dual Core *i5* 6200U CPU and front-mounted sunlight readable touch screen with IP65 Washable Front Panel standard, AcuPNL15HB makes the industrial rugged Panel PC vividly and user-friendly. In addition, the high power efficiency (9~30V DC) and low heat design guarantee the stability and longevity required for mission critical deployment.



Main Features

- Intel® 6th Gen dual core *i5* 6200U, Max.2.8GHz
- 3M SmartCache
- 1 xDDR4-2133MT/s, Max 16GB
- 1 x SATA3.0 and 1 x mSATA (default mSATA 120GB)
- 1000 nits Sunlight Readable LED panel Screen
- Resolution 1024 x768
- Viewing Angle (Left to Right) 160° to (Top to Bottom) 160°
- Response Time 5 ms
- Max Colors 16.2 Million
- Aspect Ratio 15" 4:3
- 1 x LAN
- 1 x WIFI (Optional)
- 1 x RS232
- 3x USB 2.0
- Long Life, Low Power Consumption LED Backlight
- Extreme -40°C to 60°C Operating Temp.
- Dust & Vibration Resistance
- Resistive Touch Support
- IP65 Facial Waterproof
- 9-30V DC Input
- OS Win/XP, Win 7 Pro and Win 10 Pro
- Built-in Digital Video Recorder (Optional)
- Storage Temp. -40°C to 80°C (-40°F to 176°F)
- NEMA Rating NEMA4, IP65
- Humidity ≤95%RH
- Aluminum anodized Chassis
- Dimension 396(15.6') x 310(12.2') x 59(2.32')mm
- Weight 15 lb
- Certifications CE, FCC ,IP65

Connections and Control Features




Power Switch Button and Power LED light.

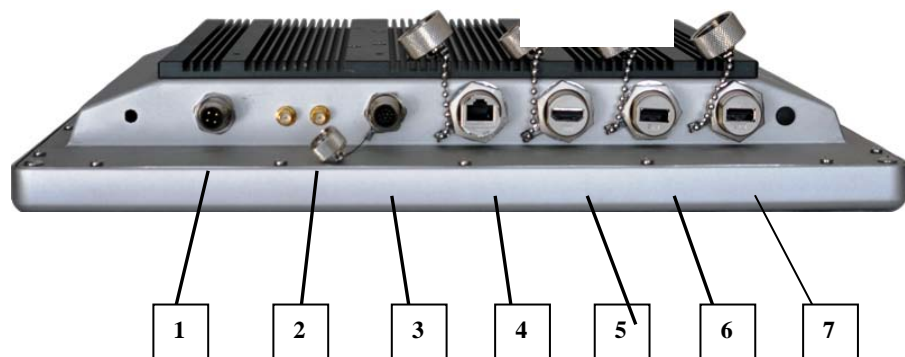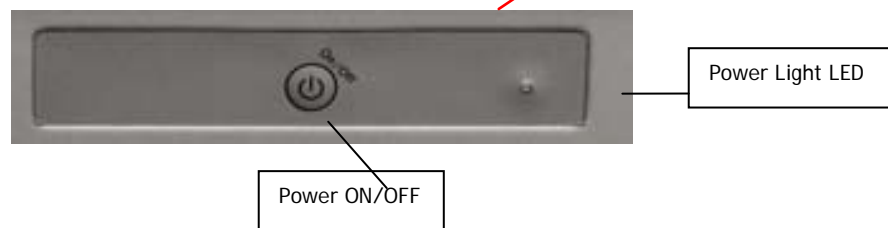

- 1. Power-In 2. Antenna 3. RS232 4. LAN 5. USB2.0 6.USB 2.0 7.USB 2.0
- 9~30 VDC

Power Cord Connection

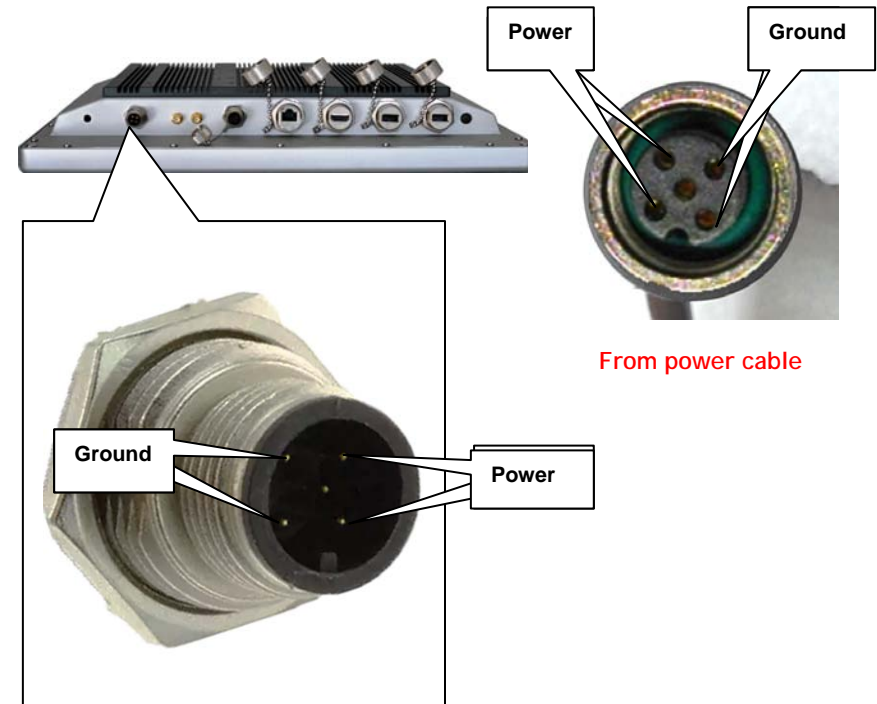

Model: AP15i54120HBW10



Technical Support:
 Toll Free 1-866-502-9666
support@acuraembedded.com
Acura Embedded Systems Inc.
 Unit #101-17825 64th Avenue
 Surrey, BC V3S 1Z3, CANADA
 Ph:604.502.9666 Fax 604.502.9668